




Project \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000



## LXnR advansys HIGH TEMPERATURE Undercounter Dishwashing Machine



### SPECIFIER STATEMENT

Specified unit will be a NSF rated high temperature Advansys™ ventless undercounter dishwasher operating on a cold water supply with steam elimination and energy recovery. Features two-level racking capability, Complete Delime™ with Delime Notification, Auto Dispensing and Booster Guard™, AutoClean, a 17" door opening, snap-in revolving upper and lower rinse arms, three selectable cycle times, 2-stage filtration, up to 30 racks per hour, .62 gallons per cycle, color touchscreen with Wi-Fi and SmartConnect App connectivity, low temperature and chemical alerts, advanced diagnostics and service connection, NSF certified pot and pan mode, detergent, rinse aid and delime pumps. Constructed of stainless steel.

**1 year parts and labor warranty.**

### STANDARD FEATURES

- + Racks per hour – Light 30 / Normal 24 / Heavy 13
- + .62 gallons of water per cycle
- + Two-level racking capability
- + High temperature sanitization unit
- + User-friendly smart touchscreen controls
- + Wi-Fi connectivity
- + SmartConnect App with machine status, temperature logs, error code reporting, and usage analysis
- + Steam elimination and energy recovery
- + AutoClean cycle washes down inside of machine at shutdown
- + NSF certified pot and pan cycle on heavy cycle
- + 17" door opening
- + Temperature and chemical alerts (lockouts available)
- + Sense-A-Temp™ 70°F rise electric booster heater
- + Chemical pumps with auto-prime for detergent and rinse-aid
- + Soft start to protect glassware
- + Advanced diagnostics and service connection
- + Complete Delime™ with Delime Notification, Auto Dispensing and Booster Guard™
- + Deep drawn stainless steel tank
- + Revolving upper and lower anti-clogging interchangeable wash arms
- + Snap-in revolving upper and lower interchangeable rinse arms
- + 2-stage wash tank filtration
- + Energy saver mode
- + Automatic pumped rinse and drain
- + Automatic fill
- + Electric tank heat
- + Combination rack
- + Peg rack (excludes LXnR-2L)
- + Two-level rack kit (LXnR-2L only)

### OPTIONS & ACCESSORIES (Available at extra cost)


- ☐ Hobart exclusive two-level racking kit boosts capacity up to 48 racks per hour
- ☐ Door lock (keeps door locked until condensing cycle is complete)
- ☐ Power cord kit
- ☐ 6" stainless steel legs
- ☐ 17" stainless steel stand with storage
- ☐ External height adjustable casters
- ☐ Internal height adjustable casters (3")
- ☐ Drain water tempering kit
- ☐ Water hammer arrestor kit
- ☐ Splash reduction panel
- ☐ Trim strip
- ☐ Pressure regulator valve
- ☐ Pumped drain air gap kit

LXnR SERIES – LXnR advansys HIGH TEMPERATURE


Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_




# LXnR advansys HIGH TEMPERATURE Undercounter Dishwashing Machine

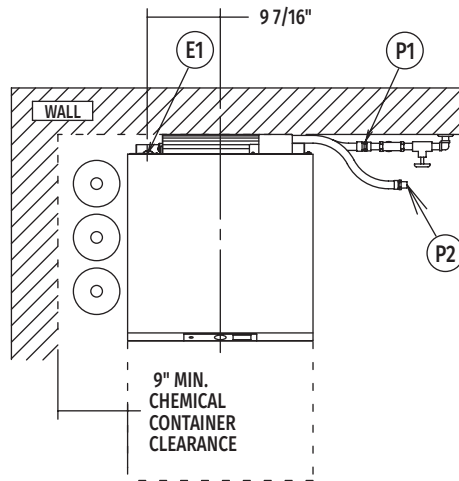


Top View

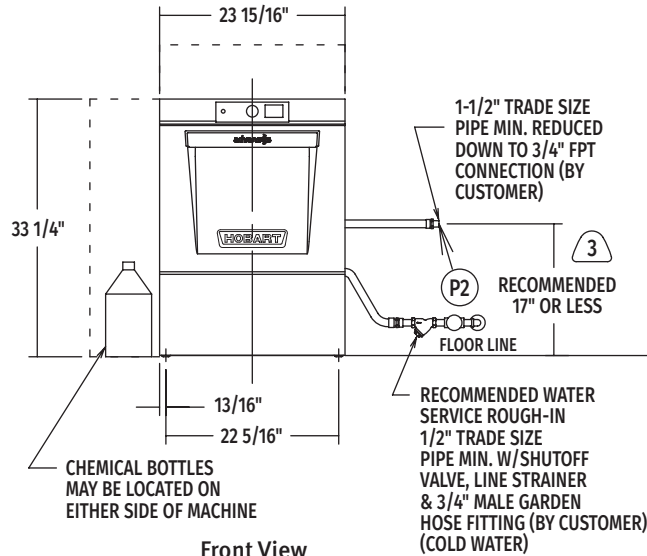

Front View

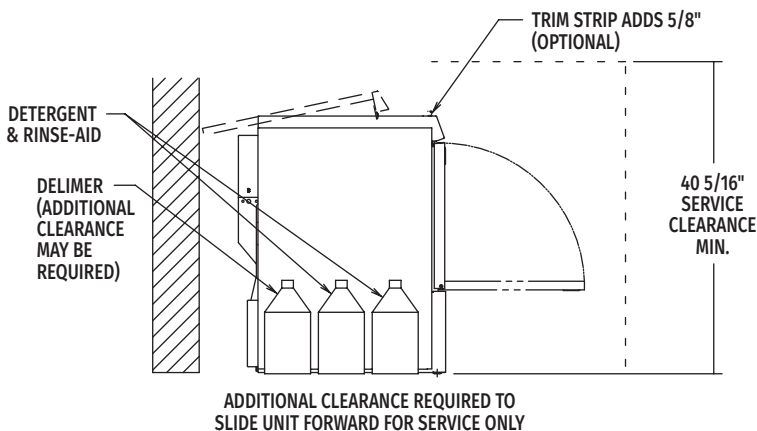

Left Side View

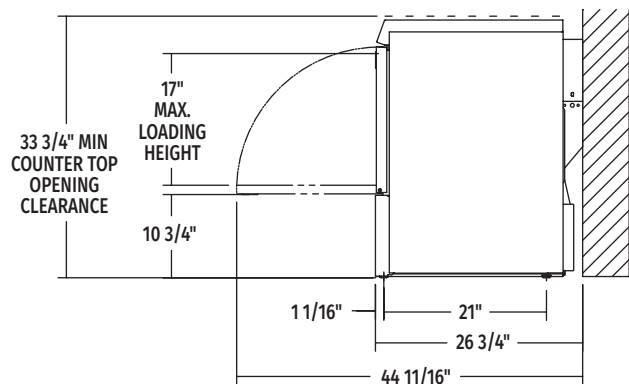

Right Side View

MODEL:  
LXnR  
00-563661  
REV: A5

CAD and/or Revit Files Available



## LEGEND

| Electrical Connections |                                                                                                                                               |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| E1                     | Electrical connection: 1-3/8" dia. hole for 1" trade size conduit; 4-5/8" AFF.                                                                |
| Plumbing Connections   |                                                                                                                                               |
| P1                     | Single fill and rinse connection: 3/4" female garden hose fitting on 6' long hose supplied with machine; 55-80°F (cold) recommended for LXnR. |
| P2                     | Common drain connection: 5/8" barb fitting with 6' long hose supplied with machine.                                                           |

**WARNING:** Electrical and grounding connections must comply with the applicable portions of the National Electrical Code and/or other local electrical codes.

Plumbing connections must comply with applicable sanitary, safety and plumbing codes. Drain and fill line configurations vary, some methods are shown on this drawing.

### NOTICE

Required flowing water pressure to the dishmachine is 15-65 PSIG. If pressures higher than 65 PSIG are present, a pressure regulating valve must be installed in the water line to the dishmachine (by others).

Pressure gauge not required on pumped rinse machines.

Important: Chemical containers should be placed no higher than 10" above floor.

If chemical containers are to be placed in cabinet adjacent to machine, a 1/2" dia. hole is required in the cabinet to run chemical supply line.

#### Notes:

1. All vertical machine dimensions taken from floor may be increased by 1".
2. Moist air escapes from the door.  
Use only moisture resistant materials adjacent to dishmachine sides and top.
3. A vent hood is not recommended above the undercounter dishmachine since it does not produce excessive vapors.

#### Plumbing Notes:

1. Water hammer arrestor (meeting ASSE-1010 Standard or equivalent) to be supplied (by others) in common water supply line at service connection.
2. Recommended water hardness to be 3 grains or less for best results.
- ③ If drain hose is looped above a sink, the loop must not exceed 38" AFF.
4. Backflow prevention provided by NSF-approved air gap device.

#### Miscellaneous Note:

1. For optimal performance, Hobart recommends maintaining a dishroom temperature of 65°F (18°C) or higher, as lower temperatures may hinder the machine's capacity to operate effectively (with lower performance as ambient temperature decreases).

## SPECIFICATIONS

### Capacities

Cycle Time (seconds) . . . . . Light 119 / Normal 148 / Heavy 278  
Racks per Hour . . . . . Light 30 / Normal 24 / Heavy 13  
Tank Capacity – Gallons . . . . . 2.9

### Motor Horsepower

Wash . . . . . 0.85  
Rinse . . . . . 0.19

### Water Consumption

U.S. Gallons per Cycle . . . . . 0.62  
U.S. Gallons per Hour (maximum use) . . . . . 18.6  
Peak Drain Flow – U.S. Gallons (gallons per minute) . . . . . 4.0

### Temperatures °F

Wash . . . . . 150  
Rinse . . . . . 180  
Incoming Water Temperature (minimum recommended) . 55-80

### Heating

Tank Heat, electric (kW) . . . . . 1.8  
Electric Booster (kW) . . . . . 4.9

### Standard 20" x 20" Rack Complement

Combination . . . . . 1  
Peg (excludes LXnR-2L) . . . . . 1  
Two Level (LXnR-2L only) . . . . . 1

**Shipping Weight (approximate)** . . . . . 215 lbs.

**Crated Dimensions** . . . . . 27"W x 30"L x 40"H

| Heat Output, BTU/Hour |          |
|-----------------------|----------|
| Latent                | Sensible |
| 1,100                 | 2,000    |

## (E1) Standard Electrical Options

| Tank Heat, Booster, Pump & Controls |            |                                 |                           |
|-------------------------------------|------------|---------------------------------|---------------------------|
| Voltage                             | Rated Amps | Minimum Supply Circuit Ampacity | Maximum Protective Device |
| 208-240/60/1                        | 33.7       | 40                              | 40                        |
| 120/208-240(3W)60/1*                | 34.0       | 40                              | 40                        |
| 208-240/60/3                        | 24.9       | 30                              | 30                        |
| 220-240/50/1                        | 33.4       | 40                              | 40                        |
| 120/208(3W)60/1*,**                 | 23.7       | 30                              | 30                        |

**NOTE:** For supply connections, use copper wire only rated at 90°C minimum.

\*This system requires three power wires which includes a current carrying neutral, an additional fourth wire must be provided for machine ground.

\*\*Booster and tank heater not energized concurrently.

Dishmachine not provided with internal GFCI protection.